

FT2267/5



CARTRIDGE MOUNTED SINGLE-ACTING CONTROL VALVES

They control and, in case, shut-off the flow in one direction and allow the full free flow in the opposite direction.

- Check valve calibrated at 0,35 bar

On request

- Knob in ABS (mp)

dimensions


Type	ØA UNI 4534	ØB	C	D	E	ØF	ØF1	G	H	L	CH	Weight kg
14	M20x1,5	16	11,5	19	30,5	27	50	43	73,5	4	27	0,130
38	M27x2	19	14	26	40	33	49	52,5	92,5	6	32	0,250
12	M33x2	27	17	27,5	44,5	38	60	60	104,5	7	41	0,340
34	M42x2	35	19,5	33	52,5	47	70	69,5	122	8	50	0,620
100	M52x2	45	22,5	42	64,5	58	120	85	149,5	12	60	1,632

materials

Body	AISI 316 stainless steel
Needle	AISI 316
OR	Viton
Antiextrusion ring	PTFE
Check valve	Acc. Inox AISI 316
Spring	Acc. Inox AISI 316
Handwheel	GD Al Si 12 - UNI 5706
Handwheel (mp)	ABS

example for ordering

Code	Type	Plastic handwheel
FT 2267/5	12	mp

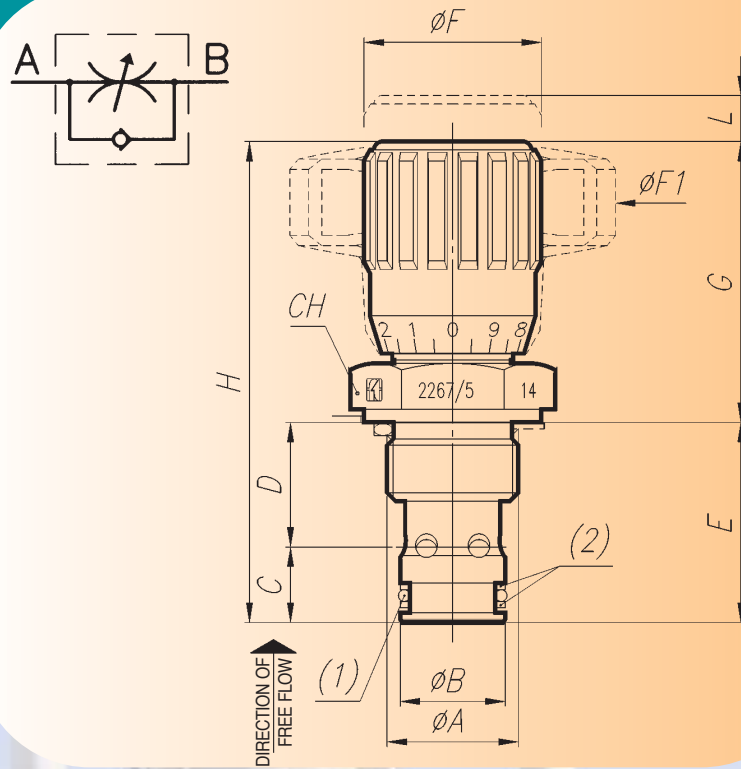

technical data



Type	Port section sq. cm	Max. working pressure bar	Min. burst. pressure bar	Working temp. °C	Filtration grade μm
14	0,07	320	1300	-20° / +130 °C	25
38	0,15	320	1300	-20° / +130 °C	25
12	0,37	320	1300	-20° / +130 °C	25
34	1,56	320	1300	-20° / +130 °C	25
100	3,80	320	1300	-20° / +130 °C	25

kit of seals for seat

Tipo	OR	Anello antiestrusione
14	2021	200-801
38	2018	2018
12	106	106
34	108	108
100	112	112

kit of seals for needle


Tipo	1(OR)	2(BK) speciale
14	2050	267/2.022.00.1-38
38	2062	267/2.022.00.1-12
12	130	267/2.022.00.1-34
34	3118	267/5.022.00.1-34
100	3156	3156




flowrate




FT 2267/5

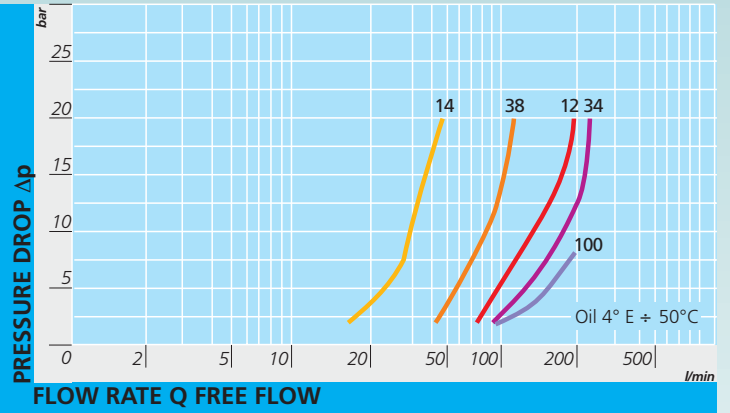

FT 2267/5 - 14

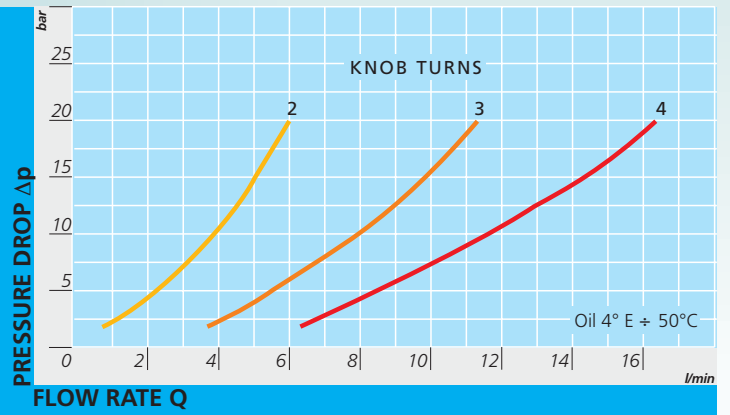


FT 2267/5 - 38

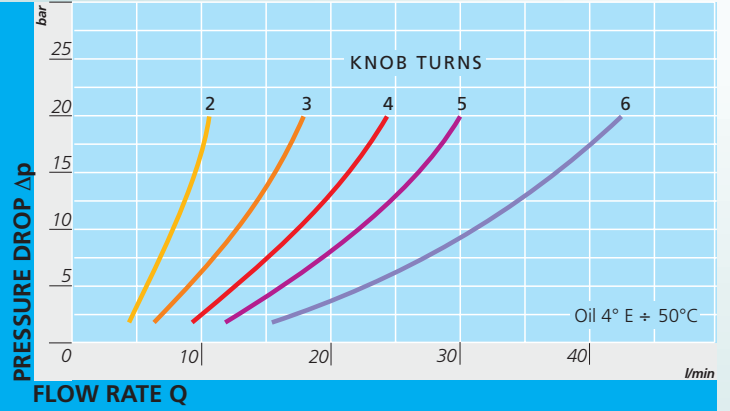


curves

FT 2267/5 - 12

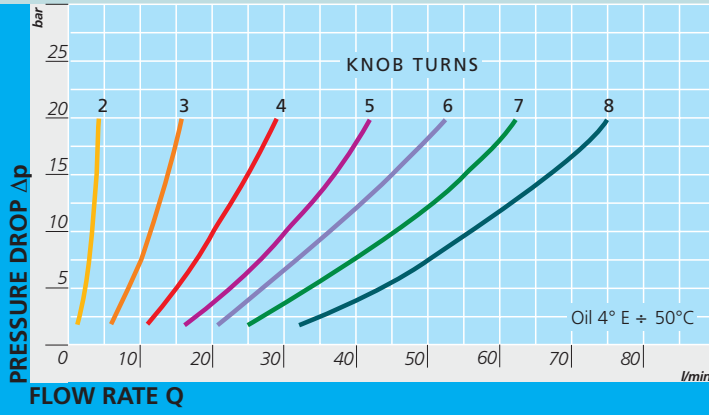

FT 2267/5 - 34

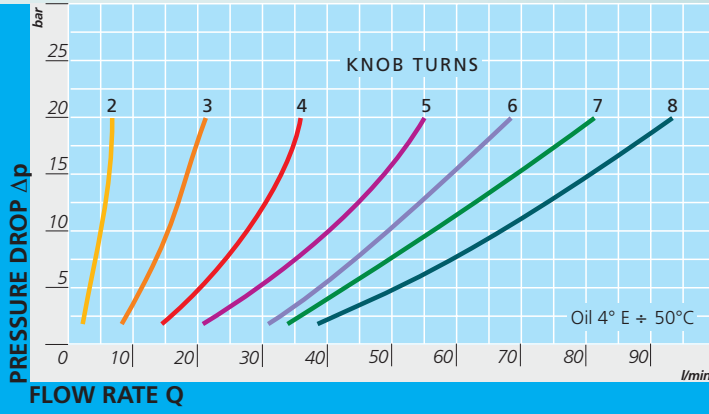

FT 2267/5 - 100

