


CETOP-07 SIZE MODULAR PRESSURE REDUCING VALVE



Characteristics

TYPE	MAX FLOW	SETTING RANGE	WEIGHT
VRP-07/250	200 l/min.	8 ÷ 240 bar	Kg. 7.5


Symbol



Description

Cetop-07 size modular pressure reducing valves. The pressure setting is adjusted by loosening the locking nut and rotating the screw of the cartridge (clockwise the pressure increases).

Dimensions

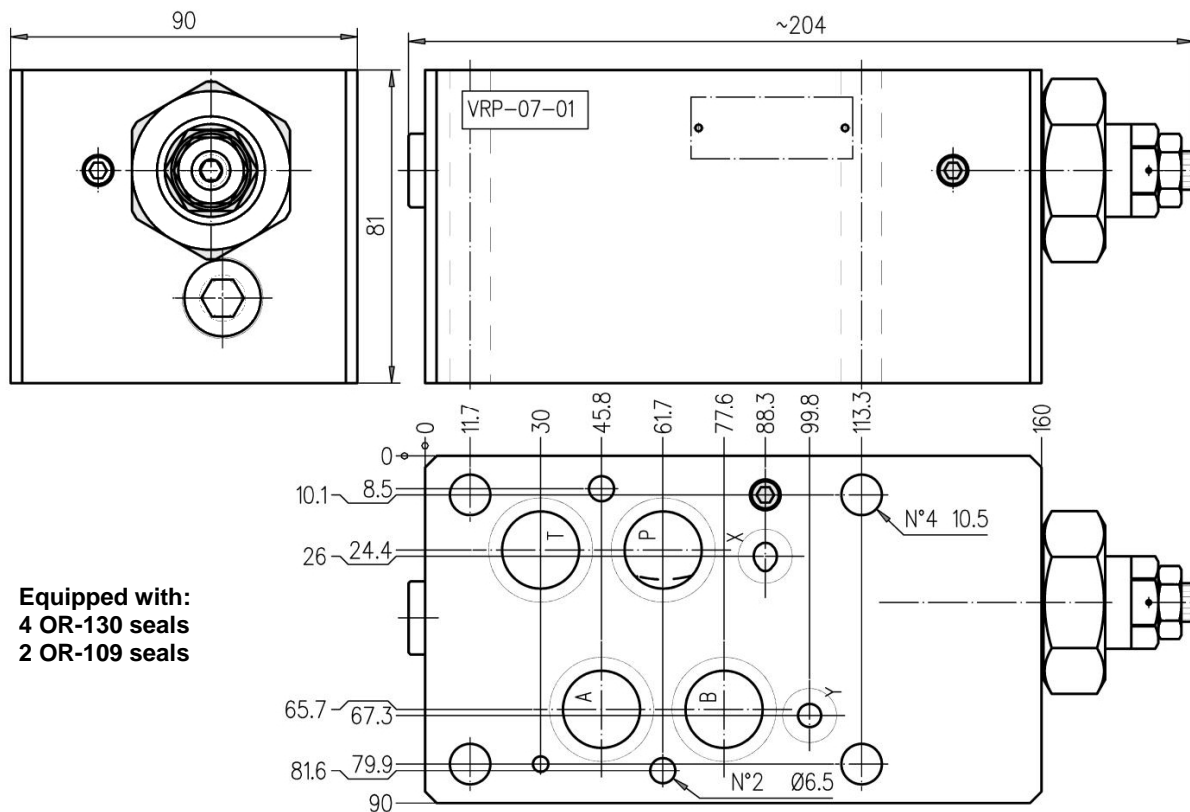

Installation rules

- The valves type VRP can be mounted in any position
- Fluid to be used: hydraulic oil in compliance with DIN 51524 rules, viscosity between 30 and 100 mm²/s (cSt) at 40°C
- Recommended filtration of the fluid: 25µ
- Hydraulic fluid temperature: from -20° to +75°C

Ordering code

VRP-07/250

CETOP- 07 size modular pressure reducing valve

Diagram

