

# CETOP-03, 4 WAY, 3 POSITION, SOLENOID VALVE WITH 350 BAR PRESSURE ON P – T – A - B




## Characteristics

TYPE	Max pressure on P – A – B - T	Max flow	Weight
IC-1591	350 bar	30 l/min	2.3 Kg.


## Description

Cetop-03 solenoid valve .

## Symbol




## Dimension

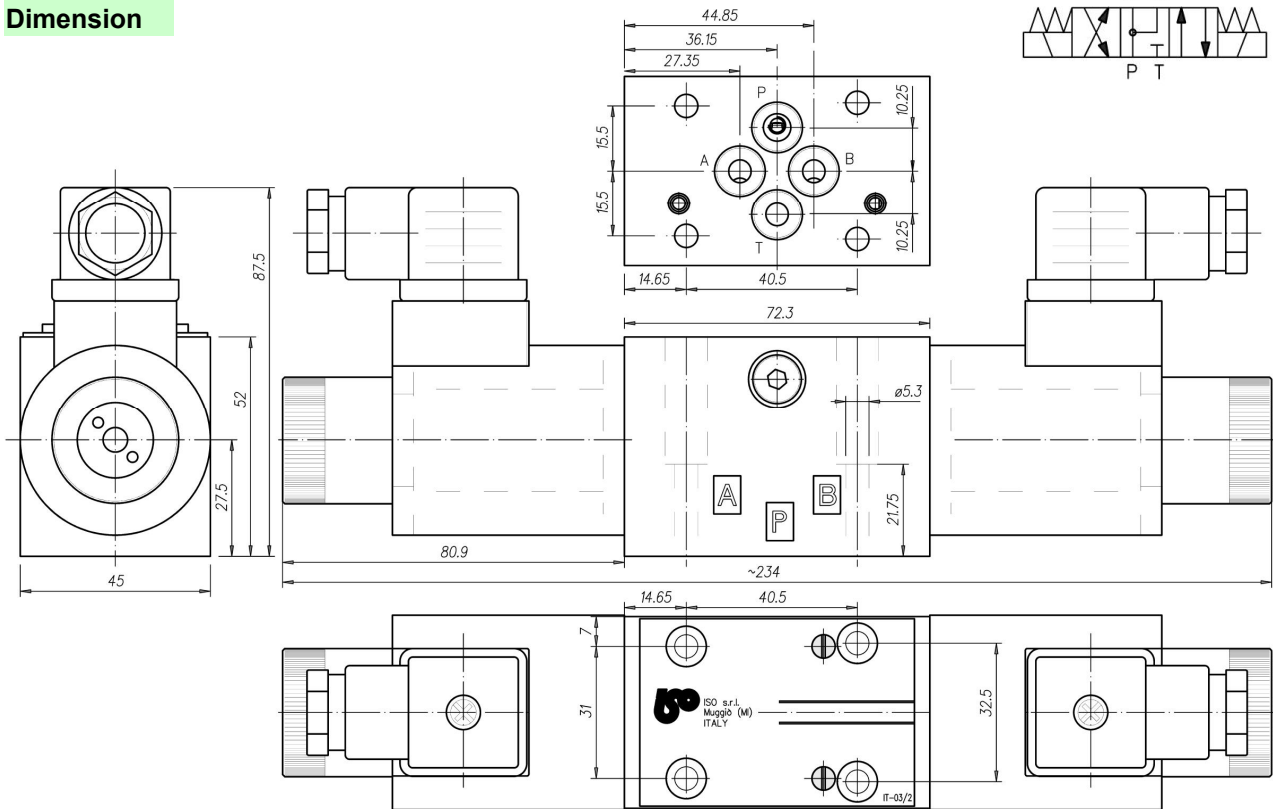

## Electric characteristics

Nominal voltage	Supply voltage tolerance	Current	Duty factor	Power consumption	Protection degree
24 DC	± 10% Vnom	1.3 Amp	100 %	33 W	IP-65

## Diagram

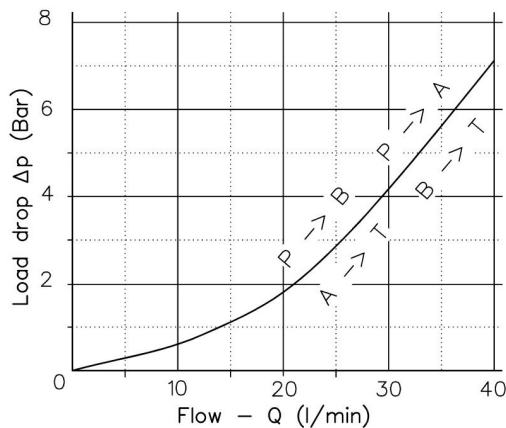

## Installation rules

- Installation: no orientation restrictions
- Fluid to be used: hydraulic oil in compliance with DIN 51524, viscosity between 30 and 100 mm<sup>2</sup>/s (cSt) at 40°C
- Recommended filtration: 25μ
- Hydraulic fluid temperature: from -20° to +80°C
- Ambient temperature: from -20° to +40°C

## Order code

**IC-1591**

CETOP-03 solenoid valve

Other voltages on request